aiwa

aiwa SERVICE

HS-JX807
HS-JX809

STEREO RADIO
CASSETTE RECORDER

SERVICE MANUAL

- BASIC TAPE MECHANISM: 6ZM–2 R2, R2NF
- TYPE: AH

S/M Code No. 09–995–412–9T1

ELECTRICAL MAIN PARTS LIST - 1/4

NOTE: The characters in the suffix column indicate the part usage.

809AH .....XX.....A.....
807AH .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	88-HJ3-606-010		PWB,FLEX 18P	AB
C 409	87-010-828-080		CHIP CAPACITOR,U 0.033-25F	AB
C 402	87-012-274-080		CHIP CAP,U 1000P-50B	AB
C 403	87-012-274-080		CHIP CAP,U 1000P-50B	AB
C 404	87-012-274-080		CHIP CAP,U 1000P-50B	AB
C 401	87-012-274-080		CHIP CAP,U 1000P-50B	AB
C 406	87-016-117-080		C-CAP,U 0.018-25 J B	AB
C 405	87-016-117-080		C-CAP,U 0.018-25 J B	AB
C 407	87-A10-952-080		C-CAP,TN 22-4 M A MCM	AB
C 408	87-A10-952-080		C-CAP,TN 22-4 M A MCM	AB
C 410	87-010-828-080		CHIP CAPACITOR,U 0.033-25F	AB
C 415	87-012-272-080		C-CAP,U 680P-50 B	AB
C 416	87-012-272-080		C-CAP,U 680P-50 B	AB
C 419	87-A10-263-080		C-CAP,U 0.1-16ZF	AB
C 417	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 411	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 418	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 412	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 414	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 413	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 422	87-010-673-080		CAP, ELECT 100-2	AB
C 421	87-010-673-080		CAP, ELECT 100-2	AB
C 426	87-010-829-080		CAP, U 0.047-16	AB
C 428	87-016-504-080		C-CAP,TN 6.8-4(A2)	AB
C 420	87-A10-263-080		C-CAP,U 0.1-16ZF	AB
C 424	87-A10-263-080		C-CAP,U 0.1-16ZF	AB
C 427	87-A10-781-080		C-CAP,U 0.15-10 K B	AB
C 423	87-A10-952-080		C-CAP,TN 22-4 M A MCM	AB
C 425	87-A10-952-080		C-CAP,TN 22-4 M A MCM	AB
C 429	87-A11-057-080		C-CAP,U 0.1-16 K B	AB
C 434	87-010-274-080		C-CAP,TN 3.3-4	AB
C 436	87-010-787-080		CAP, U 0.022-25	AB
C 438	87-012-273-080		C-CAP,U 820P-50 B	AB
C 432	87-016-286-080		C-CAP,TN 2.2-6.3 F93	AB
C 439	87-A10-263-080		C-CAP,U 0.1-16ZF	AB
C 433	87-A10-263-080		C-CAP,U 0.1-16ZF	AB
C 437	87-A10-263-080		C-CAP,U 0.1-16ZF	AB
C 431	87-A10-952-080		C-CAP,TN 22-4 M A MCM	AB
C 435	87-A10-953-080		C-CAP,TN 47-4 M B2 MCM	AB
C 440	87-A10-263-080		C-CAP,U 0.1-16ZF	AB
C 453	87-012-274-080		CHIP CAP,U 1000P-50B	AB
C 451	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 452	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 450	87-A11-056-080		C-CAP,U 1-10 Z F	AB
CN 401	87-A60-473-080		C-CONN,18P H SFV2ST	AB
IC 401	87-A20-441-010		C-IC,BA3632K	AB
J 401	85-HK3-605-010		JACK,DIA3.5 ST 5P	A
J 402	87-A60-273-010		JACK,3.5 ST 5P	.B
L 405	87-003-245-080		C-COIL,22UH	AB
L 402	87-A50-322-080		C-COIL,S BK2125 LM252	AB
L 403	87-A50-322-080		C-COIL,S BK2125 LM252	AB
L 401	87-A50-322-080		C-COIL,S BK2125 LM252	AB
L 404	87-HJ2-613-010		COIL,LOADING3.3UH	AB
Q 405	87-026-352-080		CHIP-TR,DTC144TU	AB
Q 408	87-026-352-080		CHIP-TR,DTC144TU	AB
Q 402	87-026-352-080		CHIP-TR,DTC144TU	AB
Q 404	87-026-352-080		CHIP-TR,DTC144TU	AB
Q 407	87-026-585-080		C-TR,IMX1 HQQ	AB
Q 401	87-026-597-080		C-TR,UMH3	AB
Q 403	87-026-597-080		C-TR,UMH3	AB
Q 406	89-113-625-080		TR,2SA1362GR(120MHZ,0.	AB
Q 409	89-508-804-080		CHIP FET 2SK880Y	AB
Q 415	87-026-352-080		CHIP-TR,DTC144TU	AB
Q 416	87-026-461-080		C-TR IMH3	AB
Q 410	89-508-804-080		CHIP FET 2SK880Y	AB
R 403	87-022-432-080		C-RES,U 270-1/16W F	AB
R 404	87-022-432-080		C-RES,U 270-1/16W F	AB
R 406	87-022-437-080		C-RES,U 430-1/16W F	AB
R 405	87-022-437-080		C-RES,U 430-1/16W F	AB
VR 401	88-HJ3-609-080		C-VR,RTRY 50KCX2 XV0103G	AB
C 502	87-012-274-080		CHIP CAP,U 1000P-50B	AB
C 504	87-012-274-080		CHIP CAP,U 1000P-50B	AB
C 503	87-012-274-080		CHIP CAP,U 1000P-50B	AB
C 501	87-012-274-080		CHIP CAP,U 1000P-50B	AB
C 520	87-010-746-080		CAP, TANTAL 10-4	AB
C 526	87-010-787-080		CAP, U 0.022-25	AB
C 525	87-010-787-080		CAP, U 0.022-25	AB
C 529	87-A10-031-080		C-CAP,U 0.01-25 KB	AB
C 527	87-A10-704-080		C-CAP,TN 100-2.5 M B2	AB
C 528	87-A10-952-080		C-CAP,TN 22-4 M A MCM	AB
C 522	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 521	87-A11-056-080		C-CAP,U 1-10 Z F	AB
C 524	87-A11-058-080		C-CAP,U 0.22-10 K B	AB
C 523	87-A11-058-080		C-CAP,U 0.22-10 K B	AB
C 535	87-010-196-080		CHIP CAPACITOR,0.1-25	AB

ELECTRICAL MAIN PARTS LIST - 2/4

C	536	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	533	87-010-505-080	CA, CHIP TANTALUM 1-16	AB
C	530	87-010-746-080	CAP, TANTAL 10-4	AB
C	534	87-A10-263-080	C-CAP,U 0.1-16ZF	AB
C	532	87-A11-056-080	C-CAP,U 1-10 Z F	AB
C	531	87-A11-056-080	C-CAP,U 1-10 Z F	AB
D	502	87-017-366-080	DIODE,DAN 202U	AB
D	501	87-017-367-080	DIODE,DAP 202U	AB
IC	501	87-A20-580-040	C-IC,BA3641FV	AB
IC	502	87-A20-878-040	C-IC,TK70403M	AB
J	501	87-A60-416-010	JACK,3.5 BLK ST 3P	AB
Q	506	87-026-532-080	C-TR,RN2907	AB
Q	505	87-026-532-080	C-TR,RN2907	AB
Q	507	87-026-596-080	C-TR,UMH9	AB
Q	509	87-026-596-080	C-TR,UMH9	AB
Q	502	89-508-804-080	CHIP FET 2SK880Y	AB
Q	501	89-508-804-080	CHIP FET 2SK880Y	AB
Q	503	89-508-804-080	CHIP FET 2SK880Y	AB
Q	504	89-508-804-080	CHIP FET 2SK880Y	AB
Q	512	87-026-424-080	C-TR,RN2306	AB
Q	515	87-026-524-080	CHIP TR,HN1C03F U(B)	AB
Q	516	87-026-524-080	CHIP TR,HN1C03F U(B)	AB
Q	514	87-026-532-080	C-TR,RN2907	AB
Q	517	87-026-596-080	C-TR,UMH9	AB
Q	510	87-026-596-080	C-TR,UMH9	AB
Q	518	87-026-596-080	C-TR,UMH9	AB
Q	524	87-A30-228-080	C-TR,UMB3	AB
Q	526	89-113-625-080	TR,2SA1362GR(120MHZ,0.	AB
C	441	87-010-746-080	CAP, TANTAL 10-4	AB
C	442	87-012-274-080	CHIP CAP,U 1000P-50B	AB
C	445	87-A11-058-080	C-CAP,U 0.22-10 K B	AB
C	446	87-A11-058-080	C-CAP,U 0.22-10 K B	AB
C	443	87-A11-059-080	C-CAP,U 0.47-10 K B	AB
C	444	87-A11-059-080	C-CAP,U 0.47-10 K B	AB
IC	402	87-A20-818-040	C-IC,NJM2185AV	AB
Q	414	87-026-352-080	CHIP-TR,DTC144TU	AB
R	434	87-022-252-080	C-RES,U36K-1/16WF	AB
C	705	87-A10-025-080	C-CAP,U 0.22-16Z F	AB
C	709	87-A10-031-080	C-CAP,U 0.01-25 KB	AB
C	701	87-A10-031-080	C-CAP,U 0.01-25 KB	AB
C	708	87-A10-031-080	C-CAP,U 0.01-25 KB	AB
C	707	87-A10-031-080	C-CAP,U 0.01-25 KB	AB
C	704	87-A10-263-080	C-CAP,U 0.1-16ZF	AB
C	706	87-A10-707-080	C-CAP,U 0.47U-16 F Z	AB
C	702	87-A11-057-080	C-CAP,U 0.1-16 K B	AB
C	703	87-A11-063-080	C-CAP,S 4.7-10 Z F	AB
IC	701	87-A20-961-040	C-IC,MM1279XV	AB
Q	708	87-026-481-080	TR,RN4607 (0.3W)	AB
Q	707	87-026-481-080	TR,RN4607 (0.3W)	AB
Q	706	89-113-625-080	TR,2SA1362GR(120MHZ,0.	AB
Q	705	89-113-625-080	TR,2SA1362GR(120MHZ,0.	AB
Q	704	89-113-625-080	TR,2SA1362GR(120MHZ,0.	AB
Q	703	89-342-132-080	TR,2SC4213	AB
SFR	701	87-024-406-080	C-SFR,6.8K RH03A3A	AB
TH	701	87-A90-855-080	C-THMS,SC20-3K102K	AB
PS	601	87-A90-440-010	SNSR,PHOTO GP2S24N2-	AB
Q	603	89-341-165-080	CHIP TRANSISTOR 2SC4116GR	AB
LED	601	87-070-079-080	C-LED,SML-010 VT	AB
Q	605	89-341-165-080	CHIP TRANSISTOR 2SC4116GR	AB
		88-HJ3-607-010	PWB,FLEX 4P	AB
C	802	87-016-444-080	C-CAP,TN 47-10 F95E	AB
C	803	87-016-444-080	C-CAP,TN 47-10 F95E	AB
C	804	87-A10-034-080	C-CAP,TN 33-10(B2)	AB
D	801	87-001-553-080	C-DIODE 1SS322	AB
IC	801	87-A20-603-140	C-IC,RN5RK241A	AB
L	802	87-A50-010-080	C-COIL,22UH LQH3C	AB
L	801	87-A50-174-080	C-COIL, 82UH 7004-2	AB
C	514	87-012-267-080	C-CAP,U 270P-50 B	AB
C	513	87-012-271-080	CAP, U 560P-50	AB
C	515	87-012-278-080	C-CAP,U 2200P-50 B	AB
C	518	87-012-279-080	C-CAP,U 2700P-50 B	AB
C	516	87-A10-031-080	C-CAP,U 0.01-25 KB	AB
C	517	87-A10-031-080	C-CAP,U 0.01-25 KB	AB
C	519	87-A10-952-080	C-CAP,TN 22-4 M A MCM	AB
L	501	87-HJ3-605-080	C-COIL,OSC BIAS	AB
Q	519	89-413-284-080	TR,2SD1328T	AB
Q	520	87-026-346-080	CHIP-TR,DITC114YU	AB
S	501	87-036-415-080	C-SW,SL 1-3BSSSS8	AB
C	801	87-010-674-080	CAP, ELECT 220-2	AB
C	805	87-A10-952-080	C-CAP,TN 22-4 M A MCM	AB
J	801	87-A60-319-010	JACK,DC DIA 2.75	AB
L	804	87-003-089-110	COIL,47UH FL5R200F	AB
L	803	87-003-089-110	COIL,47UH FL5R200F	AB
L	805	87-003-246-080	C-COIL,33UH	AB
Q	801	87-026-648-080	C-TR,UPA608T	AB
R	804	87-022-569-080	C-RES,0.47-1/2WK	AB
BPF	201	81-HW1-628-080	CHIP BAND PASE FILTER	AB
C	207	87-012-162-080	C-CAP,U 1P-50 CK	AB
C	206	87-012-165-080	CAP 3P	AB
C	209	87-012-193-080	C-CAP,U 82P-50 CH	AB
C	204	87-012-270-080	CAP, U 470P-50	AB
C	202	87-012-274-080	CHIP CAP,U 1000P-50B	AB

ELECTRICAL MAIN PARTS LIST - 3/4

C	205	87-A10-031-080	C-CAP,U 0.01-25 KB	AB
C	214	87-012-275-080	C-CAP,U 1200P-50 B	AB
C	212	87-A10-030-080	C-CAP,U 100P-50 CH	AB
C	210	87-A11-062-080	C-CAP,S 2.2-16 Z F	AB
D	201	87-A40-485-070	C-VARI-CAP,SVC208	AB
IC	201	87-A20-745-040	C-IC,TA2030FN	AB
L	203	87-005-564-080	CHIP-COIL S2.2MH	AB
L	202	87-A50-244-080	C-COIL,S 82NH G	AB
L	201	87-A50-245-080	C-COIL,S 0.1UH G	AB
Q	201	87-026-482-080	TR,RN4610	AB
Q	202	87-A30-188-080	C-TR,2SC4915O	AB
Q	203	89-342-153-080	TR,2SC4215	AB
TC	201	87-011-189-180	C-TRIMMER,CER 10P 4.5X3.2 CTZ	AB
TC	202	87-A90-688-080	C-TRIMMER,30P CTZ2S-30C	AB
		87-A90-291-080	C-FLTR,KMFC5132AE-TC	AB
C	259	87-012-172-080	CAPACITOR CHIP U 10P CH	AB
C	251	87-A11-062-080	C-CAP,S 2.2-16 Z F	AB
C	263	87-010-787-080	CAP, U 0.022-25	AB
C	261	87-012-140-080	CAP 470P	AB
C	260	87-012-180-080	C-CAP,U 22P-50 CH	AB
C	262	87-012-245-080	C-CAP,U 15P-50 UJ	AB
C	269	87-012-273-080	C-CAP,U 820P-50 B	AB
C	264	87-012-274-080	CHIP CAP,U 1000P-50B	AB
C	267	87-A10-263-080	C-CAP,U 0.1-16ZF	AB
C	265	87-A11-058-080	C-CAP,U 0.22-10 K B	AB
C	277	87-010-829-080	CAP, U 0.047-16	AB
C	278	87-012-274-080	CHIP CAP,U 1000P-50B	AB
C	274	87-012-274-080	CHIP CAP,U 1000P-50B	AB
C	279	87-012-282-080	CAP, U 4700P-50	AB
C	275	87-012-282-080	CAP, U 4700P-50	AB
C	276	87-012-349-080	C-CAP,S 1000P-50 CH	AB
C	270	87-A10-031-080	C-CAP,U 0.01-25 KB	AB
C	273	87-A10-422-080	C-CAP,TN 10-4 A TCF	AB
C	272	87-A11-056-080	C-CAP,U 1-10 Z F	AB
C	280	87-012-282-080	CAP, U 4700P-50	AB
C	283	87-A10-952-080	C-CAP,TN 22-4 M A MCM	AB
C	281	87-A11-056-080	C-CAP,U 1-10 Z F	AB
C	282	87-A11-056-080	C-CAP,U 1-10 Z F	AB
C	284	87-A11-062-080	C-CAP,S 2.2-16 Z F	AB
CF	251	87-A90-456-080	C-FLTR,PFWCC 450J3	AB
D	252	87-017-366-080	DIODE,DAN 202U	AB
D	251	87-A40-462-040	C-VARI-CAP,SVC347(S)	AB
IC	251	87-A20-076-040	C-IC,TA2022AFN	AB
IFT	251	87-005-788-080	C-IFT,AM (450K)	AB
L	253	87-003-245-080	C-COIL,22UH	AB
L	252	87-A50-363-080	C-COIL, 100UH J NLV25T	AB
L	251	88-HJ3-610-010	BAR-ANT,MW	AB
Q	252	87-026-343-080	C-TR,DTC123JU	AB
Q	257	87-026-425-080	C-TR,RN2307	AB
Q	259	87-026-425-080	C-TR,RN2307	AB
Q	258	87-026-480-080	TR,RN4605 (0.3W)	AB
Q	254	89-342-153-080	TR,2SC4215	AB
Q	255	89-342-153-080	TR,2SC4215	AB
Q	253	89-508-814-080	C-FET 2SK881 Y	AB
TC	251	87-011-189-180	C-TRIMMER,CER 10P 4.5X3.2 CTZ	AB
VR	251	87-A90-027-080	C-SFR,22K H CVR-32	AB
C	301	87-010-787-080	CAP, U 0.022-25	AB
C	306	87-012-167-080	C-CAP,U 5P-50 CH	AB
C	307	87-012-174-080	CAP CHIP CERA SS 12P CHJ	AB
C	308	87-012-191-080	CHIP CAP 68 PF	AB
C	305	87-A10-264-080	C-CAP,S 0.1-16ZF	AB
C	302	87-A10-419-080	C-CAP,TN 1-16 A TCF	AB
C	303	87-A10-707-080	C-CAP,U 0.47U-16 F Z	AB
C	304	87-A10-952-080	C-CAP,TN 22-4 M A MCM	AB
IC	301	87-A20-124-080	IC, TK11823	AB
L	301	87-A50-037-080	C-COIL,D-D 5CDLU	AB
Q	303	87-026-480-080	TR,RN4605 (0.3W)	AB
Q	302	89-341-165-080	CHIP TRANSISTOR 2SC4116GR	AB
Q	301	89-508-804-080	CHIP FET 2SK880Y	AB
C	606	87-010-154-080	CAP CHIP 10P	AB
C	605	87-010-154-080	CAP CHIP 10P	AB
C	603	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	607	87-A10-025-080	C-CAP,U 0.22-16Z F	AB
C	609	87-A10-263-080	C-CAP,U 0.1-16ZF	AB
C	608	87-A10-264-080	C-CAP,S 0.1-16ZF	AB
C	601	87-A10-264-080	C-CAP,S 0.1-16ZF	AB
C	604	87-A10-952-080	C-CAP,TN 22-4 M A MCM	AB
C	611	87-A10-264-080	C-CAP,S 0.1-16ZF	AB
C	610	87-A10-264-080	C-CAP,S 0.1-16ZF	AB
C	613	87-A11-056-080	C-CAP,U 1-10 Z F	AB
IC	603	87-A20-755-080	C-IC,AK93C45AF	AB
IC	604	87-A20-757-040	C-IC,S-80815ANNP-EDC-T2	AB
IC	601	87-A20-880-010	C-IC,TC9327F-013	AB
IC	602	87-A21-050-040	C-IC,S-80810ANNP-E70-T2	AB
L	605	87-A50-322-080	C-COIL,S BK2125 LM252	AB
L	606	87-A50-322-080	C-COIL,S BK2125 LM252	AB
LCD	601	88-HJ3-608-010	LCD,AIW4145	AB
Q	602	87-026-461-080	C-TR IMH3	AB
Q	601	87-026-481-080	TR,RN4607 (0.3W)	AB
R	618	87-022-223-080	CHIP RES 2.2K 1/16W F	AB
R	616	87-022-223-080	CHIP RES 2.2K 1/16W F	AB
R	617	87-022-223-080	CHIP RES 2.2K 1/16W F	AB

ELECTRICAL MAIN PARTS LIST - 4/4

R	619	87-022-227-080	C-RES,U 3.3K-1/16W F	AB
R	613	87-022-245-080	C-RES U 18K-1/16WF	AB
R	612	87-022-245-080	C-RES U 18K-1/16WF	AB
R	620	87-022-227-080	C-RES,U 3.3K-1/16W F	AB
R	621	87-022-231-080	C-RES,U 4.7K-1/16W F	AB
S	605	87-036-220-080	C-SW,T	AB
S	601	87-036-220-080	C-SW,T	AB
S	604	87-036-373-080	C-SW,SLIDE 1-1-2(E)	AB
S	603	87-A90-356-210	SW,LEAF 6ZM-2	AB
S	602	87-A90-361-010	SW,PUSH SPPB51-H11.3	AB
S	608	87-A90-665-180	C-SW,TACT LS7A2M	AB
S	606	87-A90-665-180	C-SW,TACT LS7A2M	AB
S	607	87-A90-665-180	C-SW,TACT LS7A2M	AB
S	609	87-A90-665-180	C-SW,TACT LS7A2M	AB
S	611	87-036-203-180	C-SW,SL1-1-3 SSSS81	AB
S	613	87-A90-378-080	C-SW,PUSH PT035C1T	AB
S	612	87-A90-378-080	C-SW,PUSH PT035C1T	AB
S	610	87-A90-665-180	C-SW,TACT LS7A2M	AB
S	614	87-HJ3-608-010	SW,LEAF REC ASSY	AB
S	615	87-HJ3-608-010	SW,LEAF REC ASSY	AB
X	601	87-A70-078-110	VIB,XTAL 75KHZ KF-26R5	AB

MECHANICAL PARTS LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

[N]809AH .....XX.....A.....
[S]807AH .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	88-HJ3-001-110		CABI,REAR LCD S	.....
	88-HJ3-002-010		LID,CASS S	.B.....
	88-HJ3-003-010		PANEL,CONT	.....
	88-HJ3-004-010		FRAME,CENTER	.....
	88-HJ3-005-010		WINDOW,LCD	AB.....
	88-HJ3-006-010		LID,BAT	AB.....
	88-HJ3-007-010		WINDOW,CASS	AB.....
	88-HJ3-017-110		CABI,REAR LOW S	.B.....
	88-HJ3-020-010		FRAME,CENTER LOW	.B.....
	88-HJ3-022-010		PANEL,CONT JX807	.B.....
	88-HJ3-027-010		CABI,REAR 809 N	A.....
	88-HJ3-028-010		LID,CASS 809 N	A.....
	88-HJ3-029-010		PANEL,CONT 809 N	A.....
	88-HJ3-030-010		FRAME,CENTER N	A.....
	88-HJ3-033-010		PANEL,CONT JX807 AIS	.....
	88-HJ3-008-010		KNOB,SL OPEN	AB.....
	88-HJ3-009-010		KNOB,SL HOLD	AB.....
	88-HJ3-010-010		KNOB,SL SIDE	AB.....
	88-HJ3-011-010		KNOB,SL REC	AB.....
	88-HJ3-012-010		STOPPER,REC	AB.....
	88-HJ3-013-010		KEY,CONT	AB.....
	88-HJ3-014-010		KEY,BAND	AB.....
	88-HJ3-015-010		KEY,TUNING	AB.....
	86-HJ3-222-010		S-SCREW,SERR+1.4-2 CR L	AB.....
	86-HK4-224-010		S-SCREW,SERR+1.4-3.5 CR L	AB.....
	87-067-384-010		SCREWVT1.4-3.5HL	AB.....
	87-067-534-010		SCREW,VT-1.4-6	AB.....
	87-078-113-010		S-SCRW,+1.4-3.5 HL(B	AB.....
	87-078-145-010		S-SCRW,+1.4-0.8 CR N	AB.....
	87-078-153-010		SCRW,1.4-2.5 CR	AB.....
	87-078-185-010		SCRW-SR,1.4-4.5 BL	AB.....
	87-078-216-010		SCRW-SR,1.4-1.4B LS	AB.....
	87-078-218-010		SCRW-SERR,M1.4-5.3	.B.....
	87-262-512-310		V+1.4-5.5	AB.....
	87-HK5-235-010		S-SCREW,1.4-0.6-2.5	AB.....
	88-HJ3-219-010		S-SCREW,+1.4-2.5 B HL(0.3)	AB.....
	88-HJ3-220-010		S-SCREW,+1.4-0.7-1 BLK NL	AB.....
	88-HK5-228-010		S-SCREW,+1.4-2 CR	AB.....
	88-HR4-222-010		S-SCREW,+1.4-1.6 CR (0.2)	AB.....
	82-HK3-206-110		C-SP,LOCK	AB.....
	87-HR5-225-010		SPR-E,EJECT N	AB.....
	87-HR6-219-010		SPR-P,POP UP	AB.....
	88-HJ3-201-010		STOPPER,CASS	AB.....
	88-HJ3-202-010		HLDR,CASS	AB.....
	88-HJ3-203-010		SPR-P,CLICK	AB.....
	88-HJ3-204-010		HLDR,ANTENNA	AB.....
	88-HJ3-205-010		SPR-P,CASS	AB.....
	88-HJ3-206-010		PLATE,HINGE	AB.....
	88-HJ3-207-010		PLATE,LOCK	AB.....
	88-HJ3-208-010		NUT, FRONT	AB.....
	88-HJ3-210-010		HLDR,BAT	AB.....
	88-HJ3-211-010		TERMINAL,BAT+	AB.....
	88-HJ3-212-010		TERMINAL,BAT-	AB.....
	88-HR4-201-010		HLDR,LCD	AB.....
	88-HR6-209-010		CONN, RUBBER 1.1	AB.....
	88-HJ3-606-010		PWB,FLEX 18P	AB.....
	88-HJ3-607-010		PWB,FLEX 4P	AB.....
	87-A90-291-080		C-FLTR,KMFC5132AE-TC	AB.....

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

809AH1NF .....XX.....A.....
807AH1SF .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	88-HJ3-901-010		IB,EC-808	.....
	88-HJ3-902-010		IB,EC-807	.B.....
	88-HJ3-903-010		IB,SF-807	.....
	88-HJ3-904-010		IB,E-807	.....
	88-HJ3-905-010		IB,H(EC)S 809	A.....
	88-HJ3-906-010		IB,H(EC)S 807	.....
	86-HJ4-950-010		CASE,CARRYING	AB.....
	87-041-083-110		CM-S40A	.B.....
	87-047-153-210		BAT,NB-3A PH	AB.....
	87-B30-122-010		HEADPHONE,HP-M023	.....
	87-B30-135-010		CHARGER,RB-N01HNC	AB.....
	87-B30-138-010		MIC,CM-MS001	A.....
	87-B30-152-010		HEADPHONE,HP-MR002A(T)	.B.....
	87-B30-174-010		CHARGER,RB-N01UNC	.....
	87-B30-253-010		HEADPHONE,HP-M041	A.....
	88-HJ3-951-010		RC UNIT,RC808	.....
	88-HJ3-952-010		RC UNIT,RC809	A.....

SCHEMATIC DIAGRAM – 1 (MAIN : 1/2 / JACK / DD / FLEX) <HS-JX807>

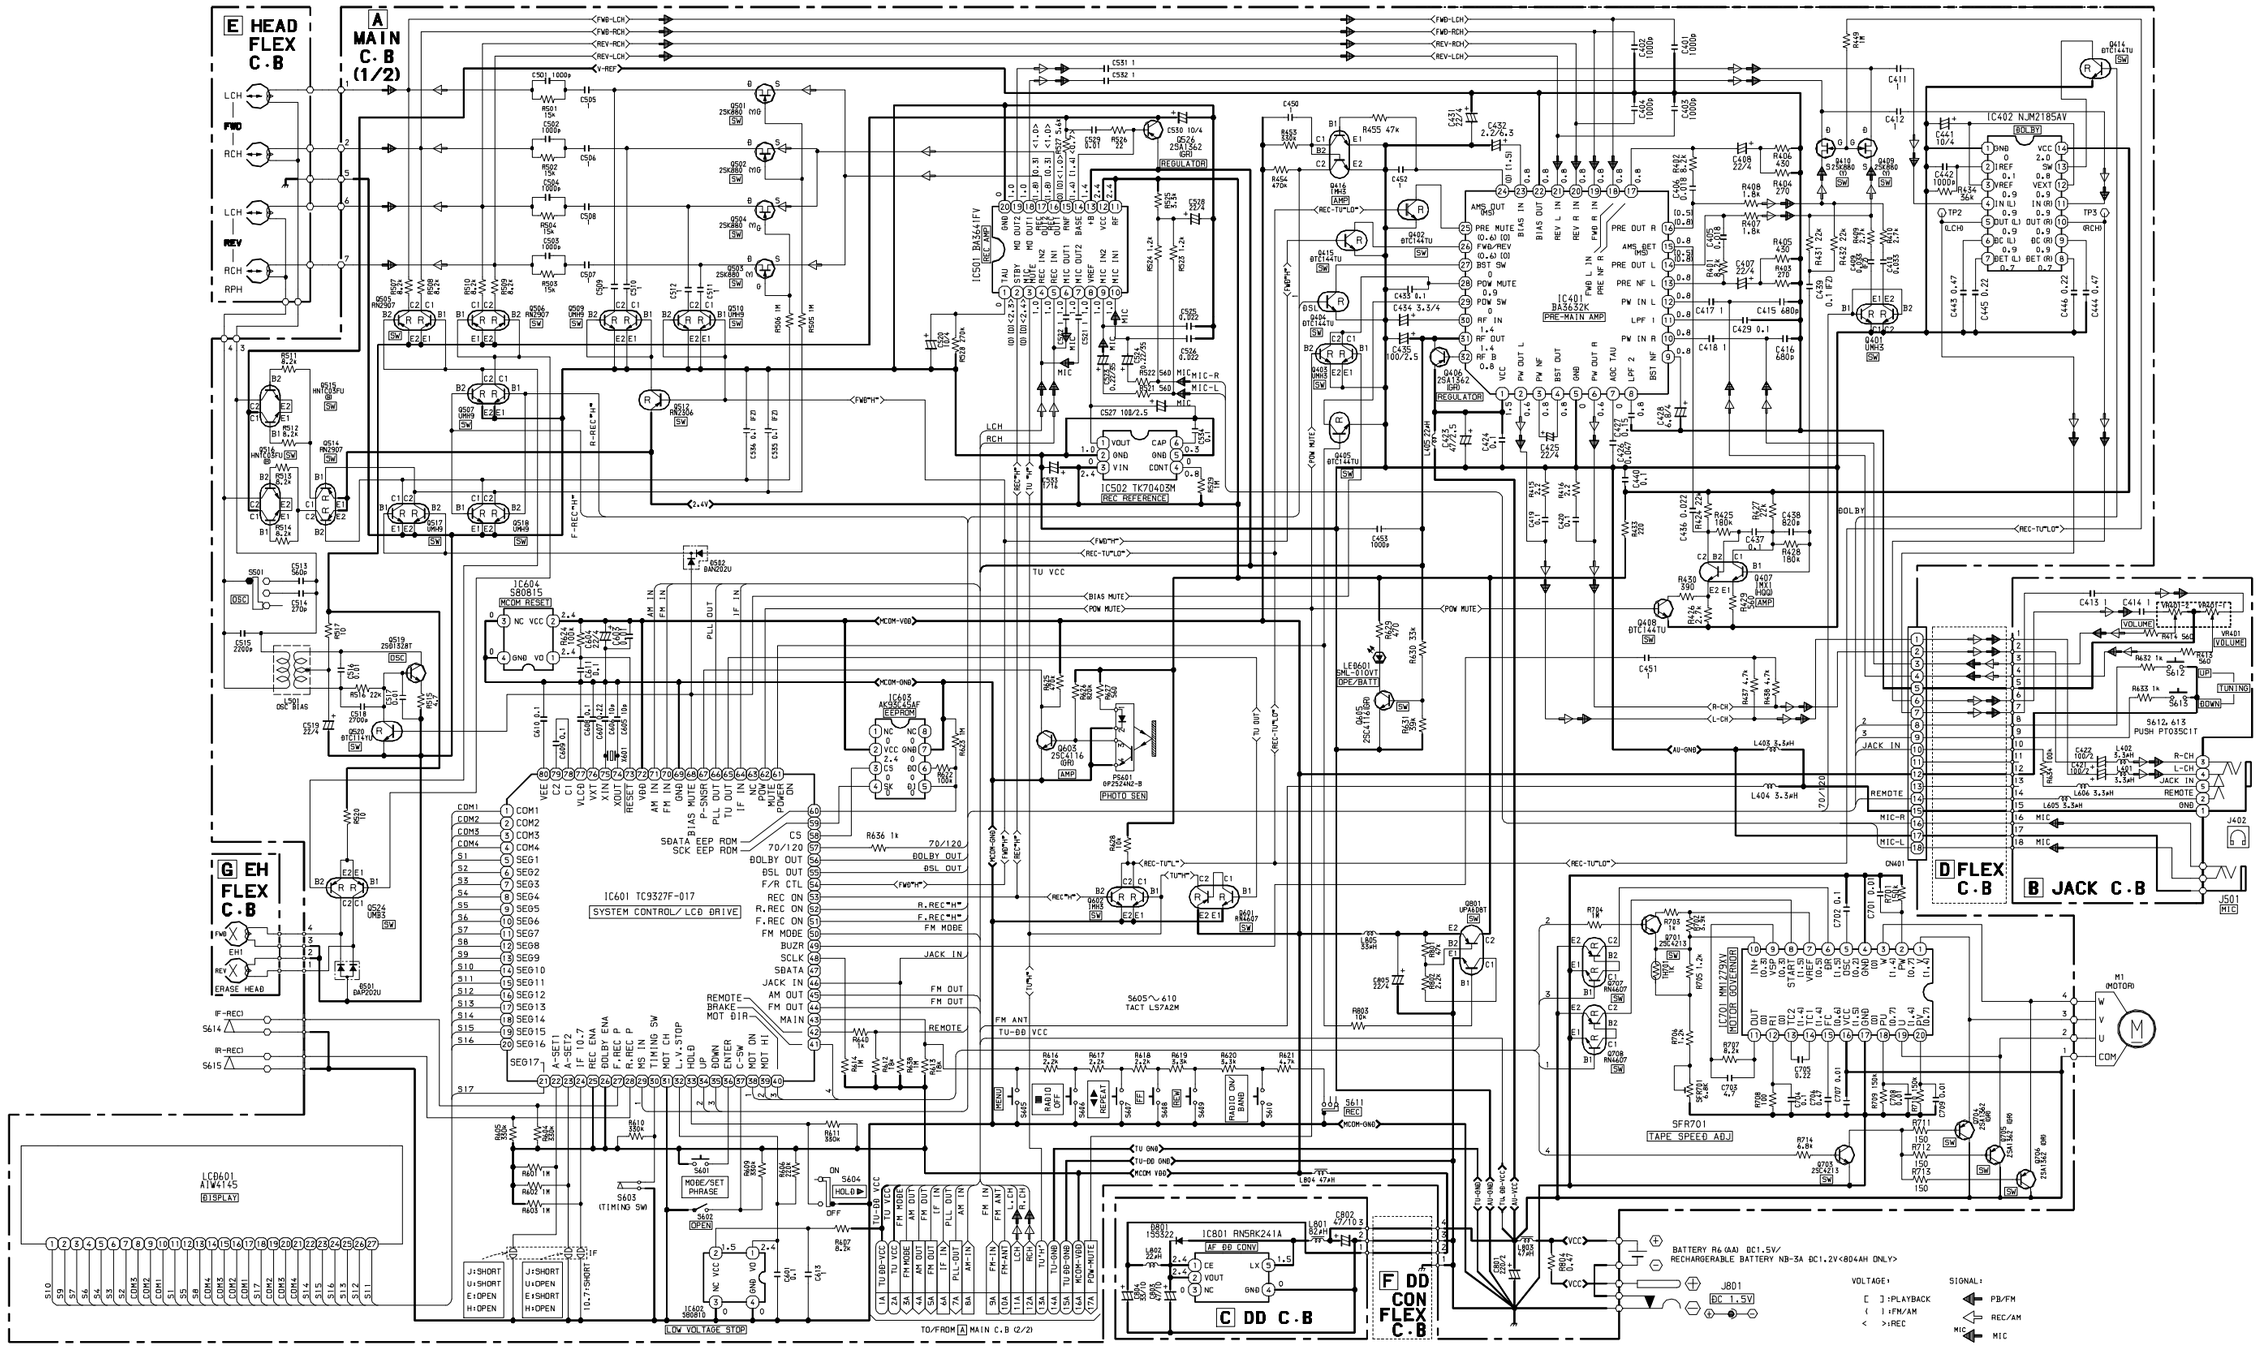

SCHEMATIC DIAGRAM – 2 (MAIN : 1/2 / JACK / DD / FLEX) <HS-JX809>

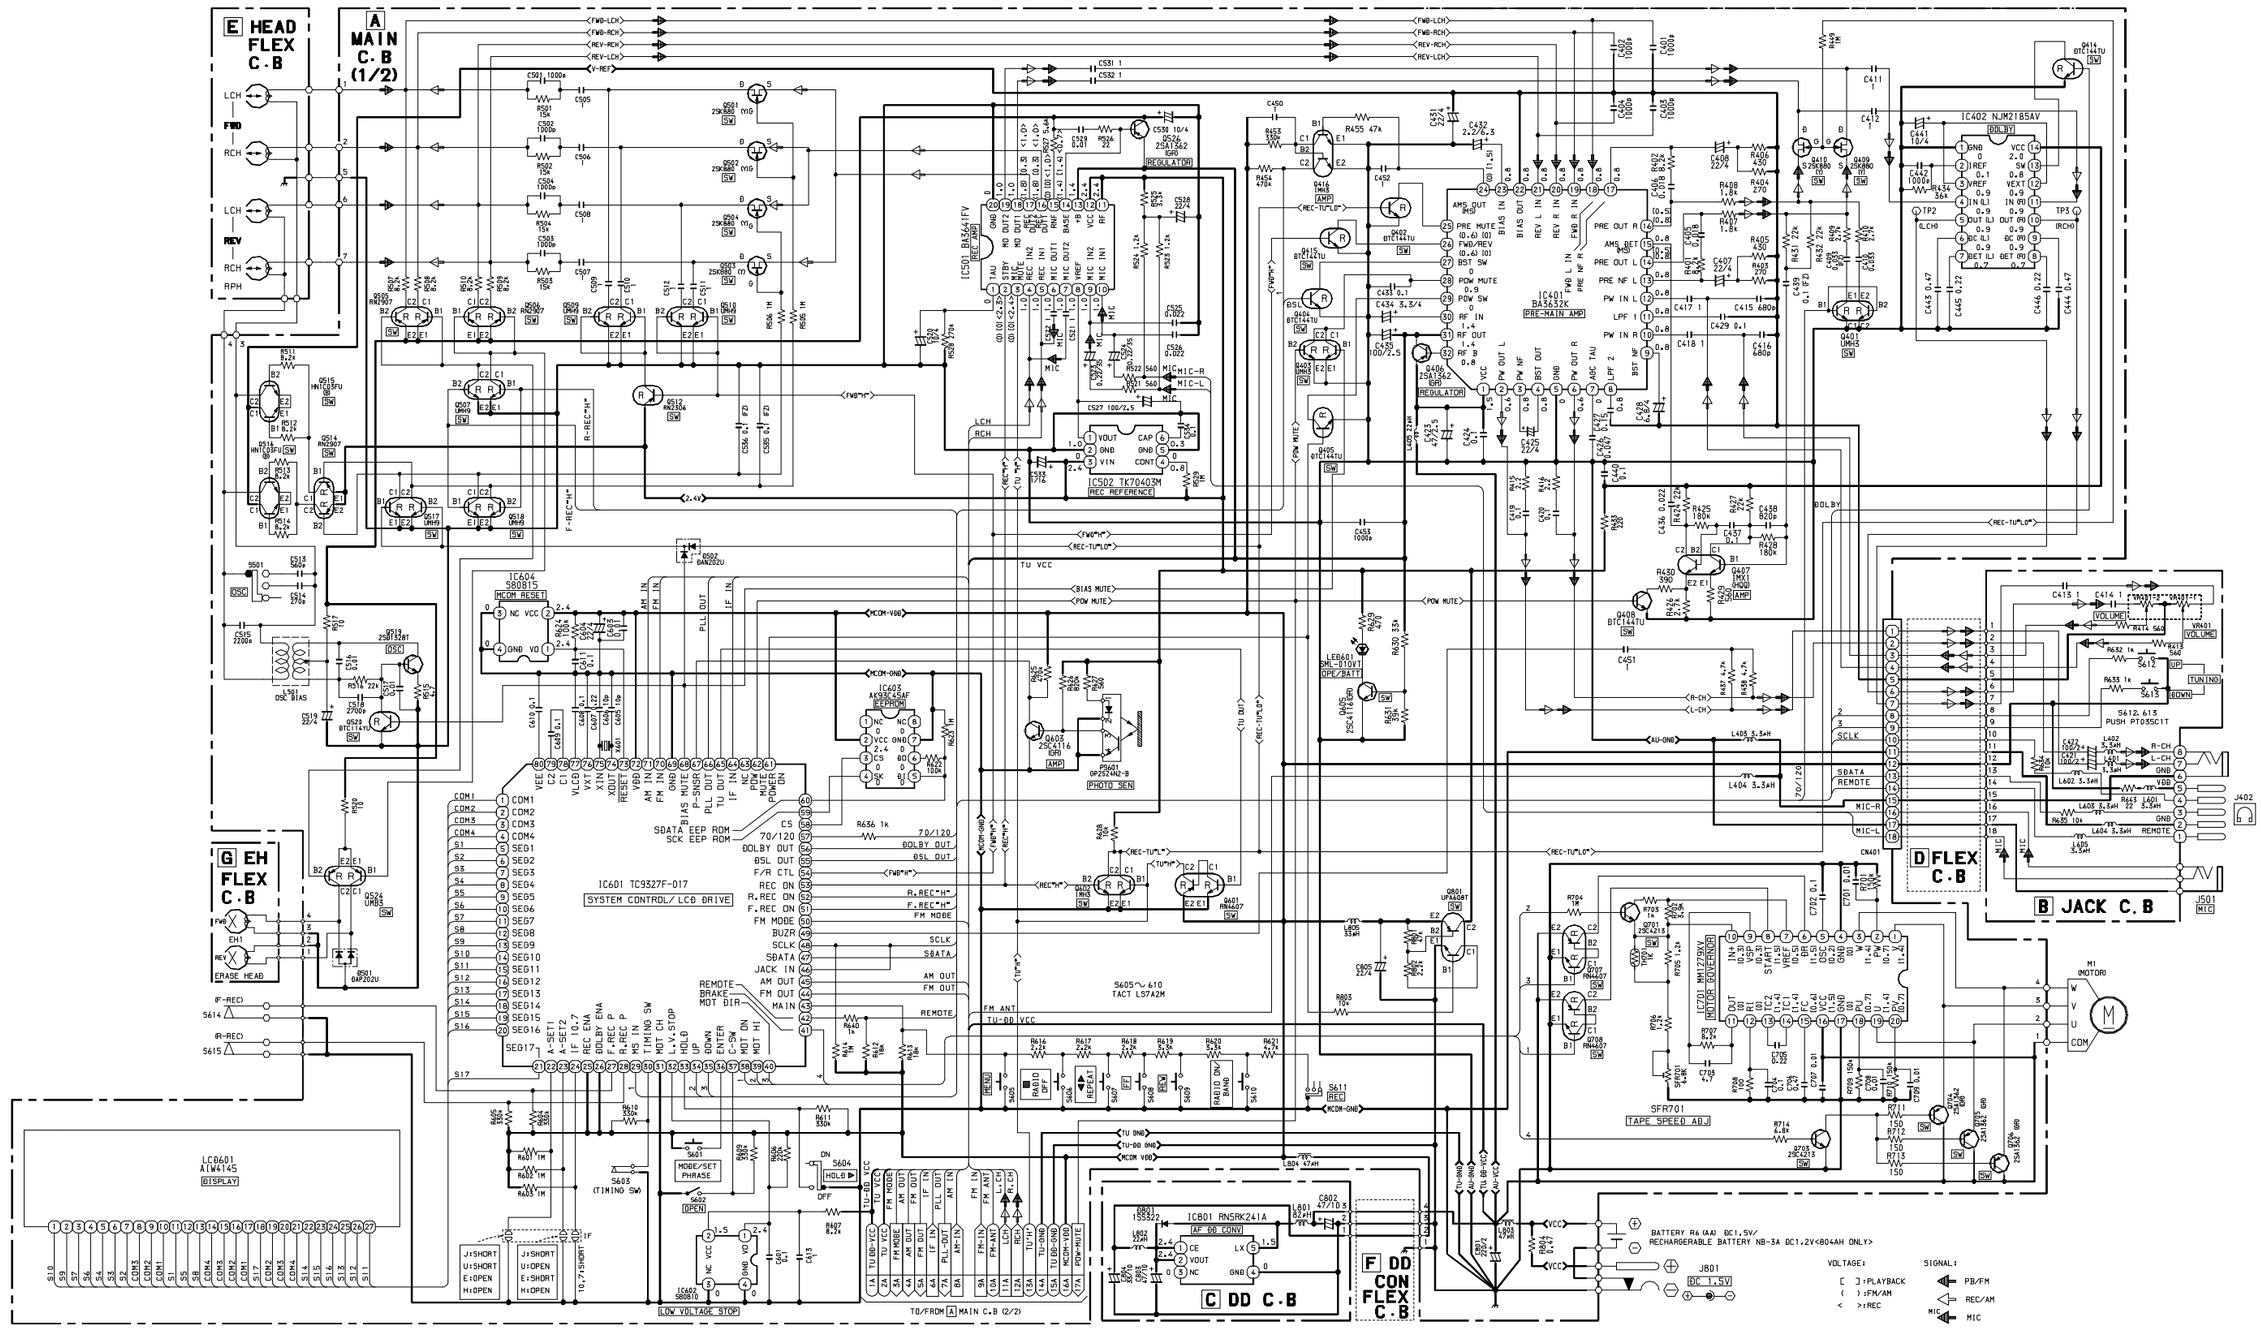

SCHEMATIC DIAGRAM – 3 (MAIN : 2/2)

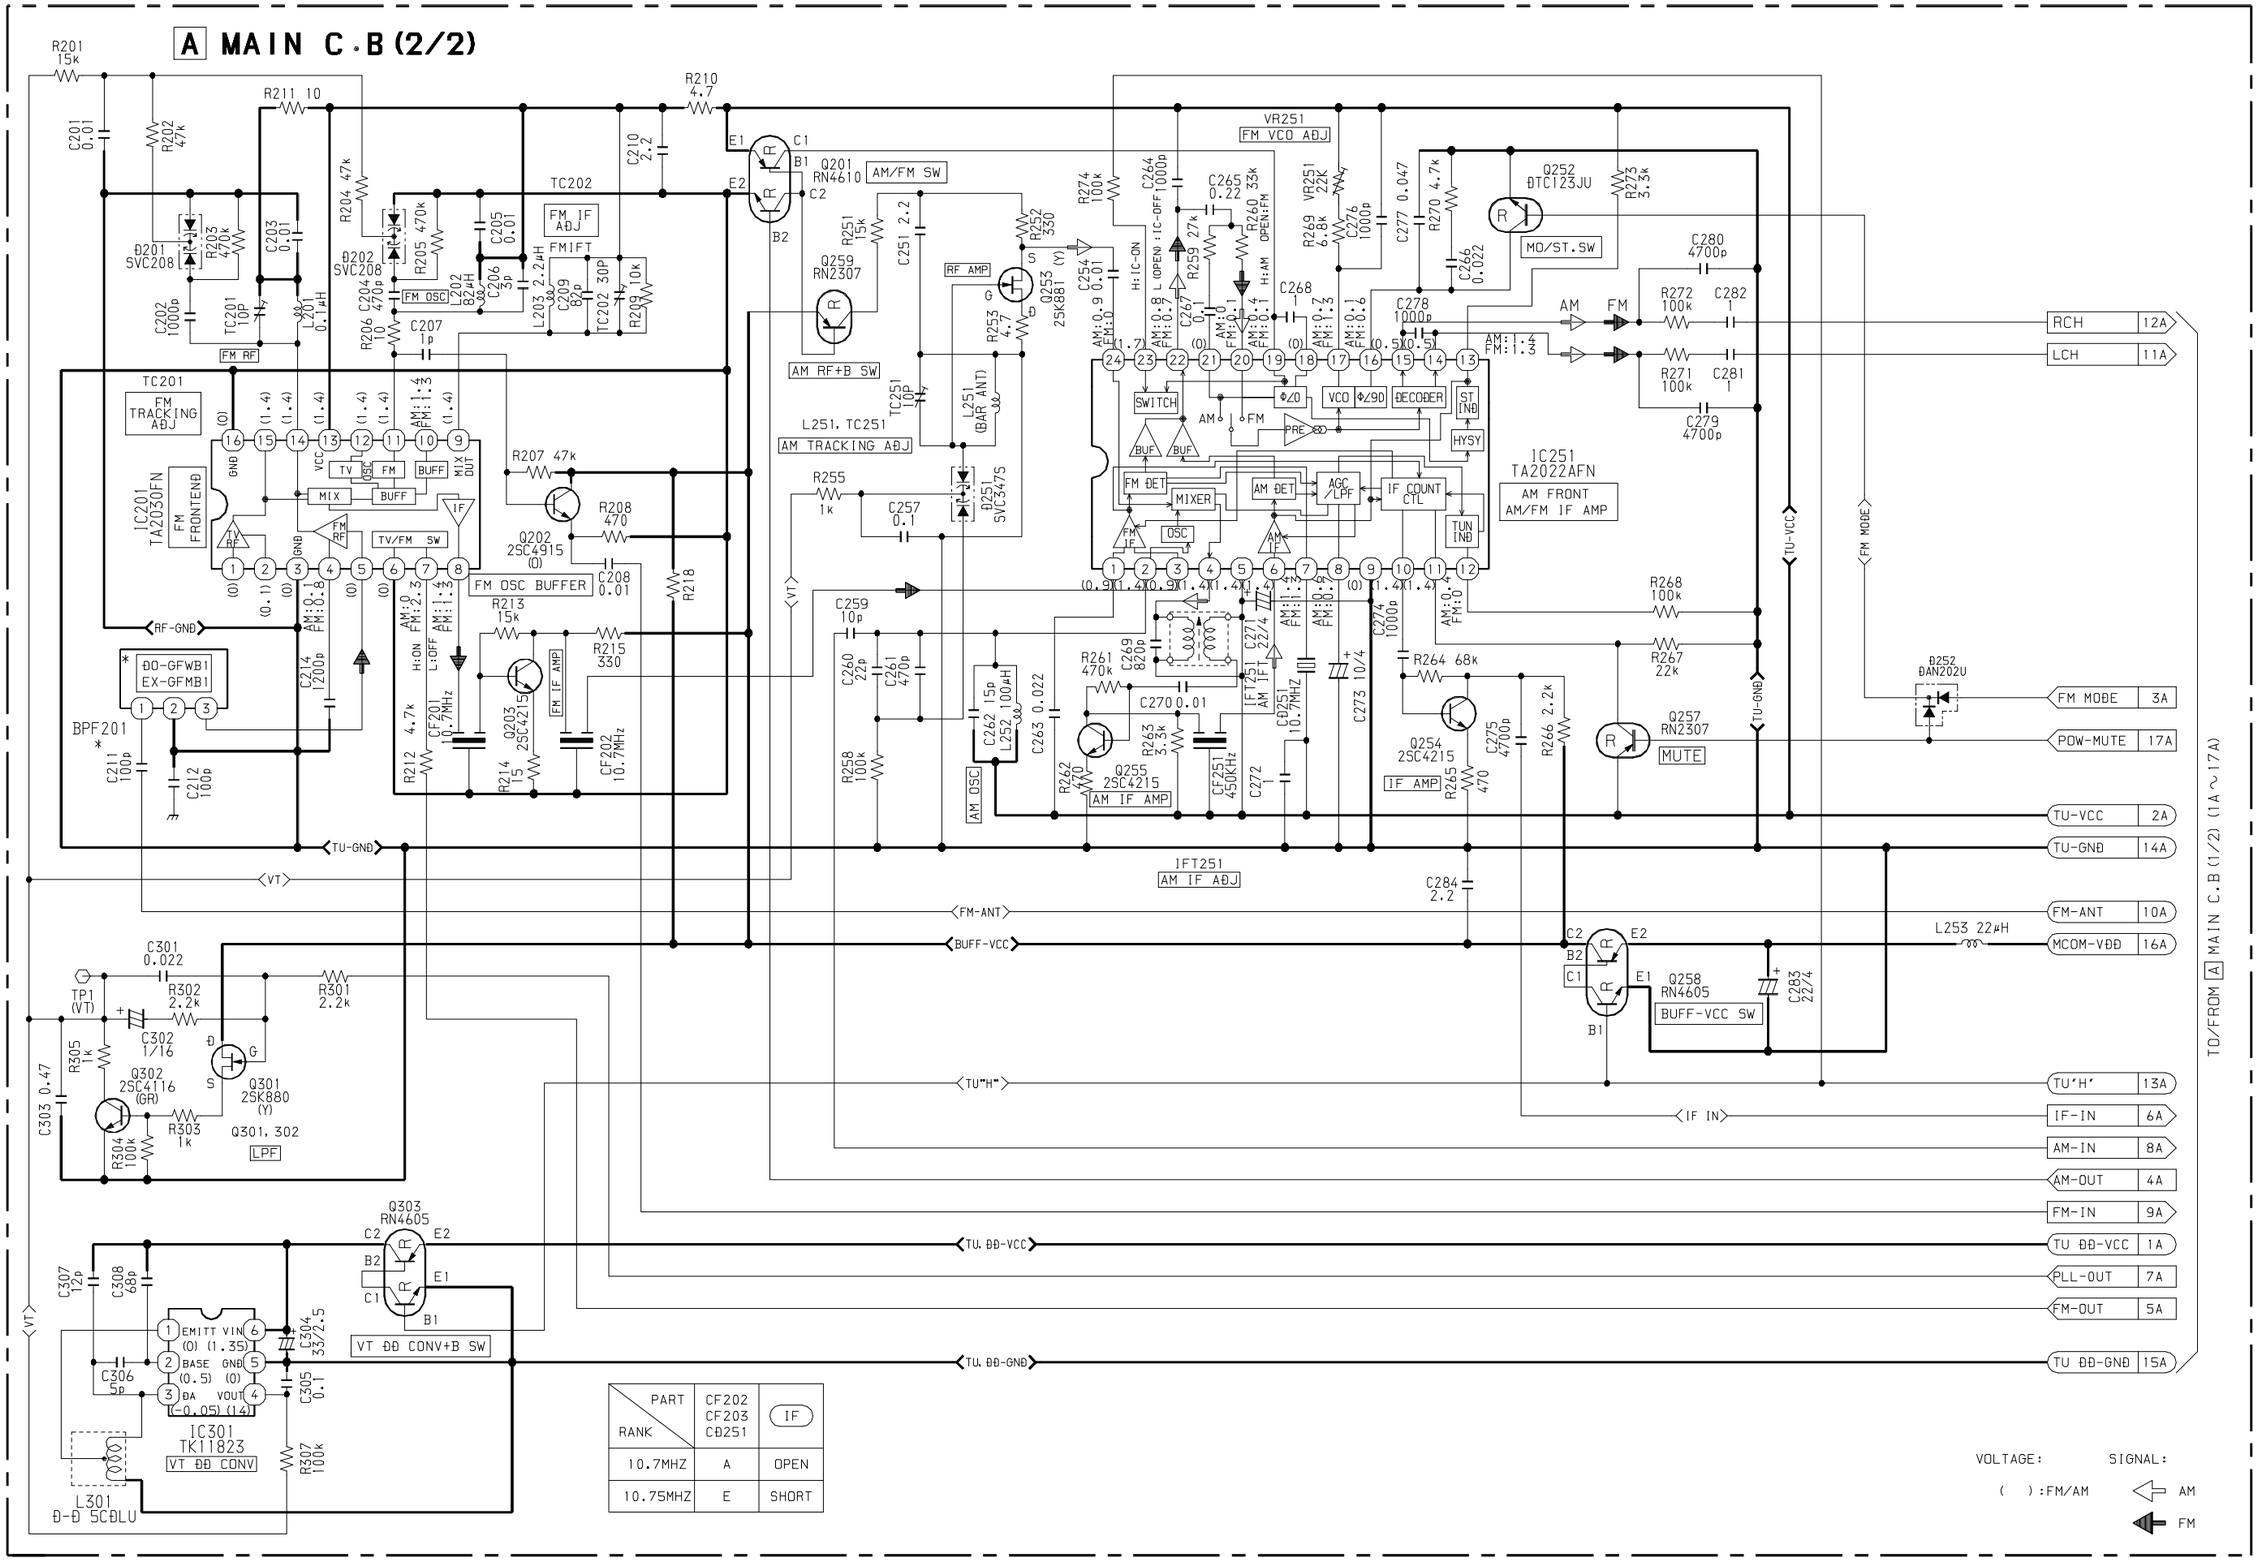

PART / RANK	CF202 CF203 CĐ251	IF
10.7MHZ	A	OPEN
10.75MHZ	E	SHORT

サービス技術ニュース	
番号	連絡内容
G－　－	
G－　－	
G－　－	

アイワ株式会社
AIWA CO.,LTD.

9420025
Tokyo Japan

〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 （代表）

Printed in Singapore